





Beam : 40°x50°
Angles

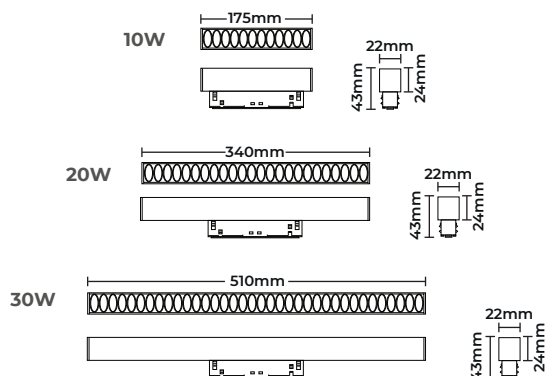

Reflector Color(Optional):

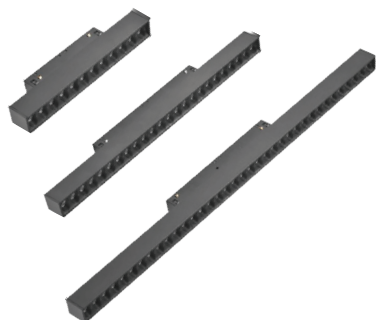

Applications:

Hospitality, retail, recreational facilities, restaurants, offices, education, healthcare, residential villas, contemporary dwelling units including penthouses, condominiums, apartments and residential towers.



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Linear
Mounting Type	Track Mounted
LED Type	SMD LED module
Power Options	10W 20W 30W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
Luminous Efficacy	50-55lm/W
Beam Angles	40°x50°
CRI	90(Standard) 95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Body Material	Die cast aluminium
Reflector	Aluminium
Optics	Lens
Housing Finish	Electrostatic powder coating
Housing Color	Black as standard White(Optional)


Environmental

Installation Environment	Indoor
IP Rating	IP20
Operating Temperature	-20° ~ 35°C

Driver

Voltage	48VDC
Class Rating	Class II
Power Factor	>0.95
Standard	On/off
Dimming Options	0-10V DALI2

Track Options:

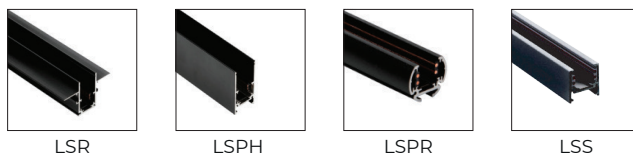

Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Length (mm)	Housing Finish	Reflector Finish	Driver
LSC	2.7K=2700K	10W	40°x50°	175mm	B=Black W=White C=Custom	B=Black W=White G=Gold	S=On/Off D=DALI 2 V=0-10V
	3K =3000K	20W		340mm			
	3.5K=3500K	30W		510mm			
	4K =4000K						
	5K =5000K						

* Please choose wattage and length from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
LSC-3K-10W-40x50°-175mm-B-B-S	10W	3000K	500lm	175 X 22 X 43
LSC-3K-20W-40x50°-340mm-B-B-S	20W	3000K	1100lm	340 X 22 X 43
LSC-3K-30W-40x50°-510mm-B-B-S	30W	3000K	1650lm	510 X 22 X 43

* Please contact us for other CCT(2700K, 3500K 4000K and 5000K) and Dimming control options.