


### Mounting Options:



### Applications:

Pathways, plazas, parks, gardens, hardscape, softscape and other public areas.

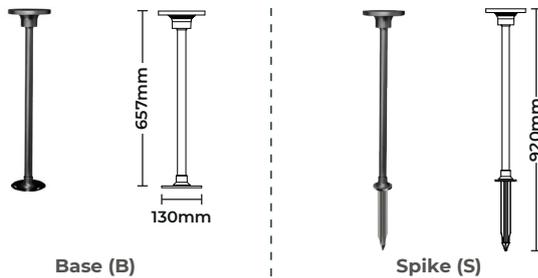

### Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

## Key Information

Shape	Round
Mounting Type	Bollard
LED Type	SMD LED module
Power Options	9W
CCT(K) Options	3000K   4000K   5000K
Luminous Efficacy	72.22LM/w
Beam Angles	360°(Downward)
CRI	85
SDCM	< 3
Lifespan	50,000 hours

## Physical

Body Material	Die cast aluminium
Diffuser	PC Thickness=1.3mm
Gasket	Tooling shaped seal
Housing Finish	Electrostatic powder coating
Housing Color Options	Sanded Black (RAL 9005) Sanded Dark Grey (RAL 7037) Sanded Bronze (RAL7008) Sanded Silver Grey (RAL 9022)
Power Cable	24VDC: H05RN-F 2x1.0mm², L=0.5m

## Environmental

Installation Environment	Outdoor
IK Rating	07
IP Rating	IP65
Operating Temperature	-20° to 50°C

## Electrical

Input Voltage	24VDC
Standard	On/off
Dimming Options	DALI2   1-10V

## Ordering Guide:

Product	CCT (K)	Wattage (W)	Mounting Options	Beam Angle(°)	Color Finish	Driver
DI = Dish	3K=3000K 4K=4000K 5K=5000K	9W	B = Base	360°	B=Black <b>Optional</b> - DB=Dark Grey BR=Bronze SG=Silver Grey	S=On/Off V=1-10V D=DALI2
			S = Spike			

\* Please choose mounting option from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
DI-3K-9W-B-360°-B-S	9W	3000K	650lm	150 x 657mm
DI-3K-9W-S-360°-B-S	9W	3000K	650lm	150 x 920mm