



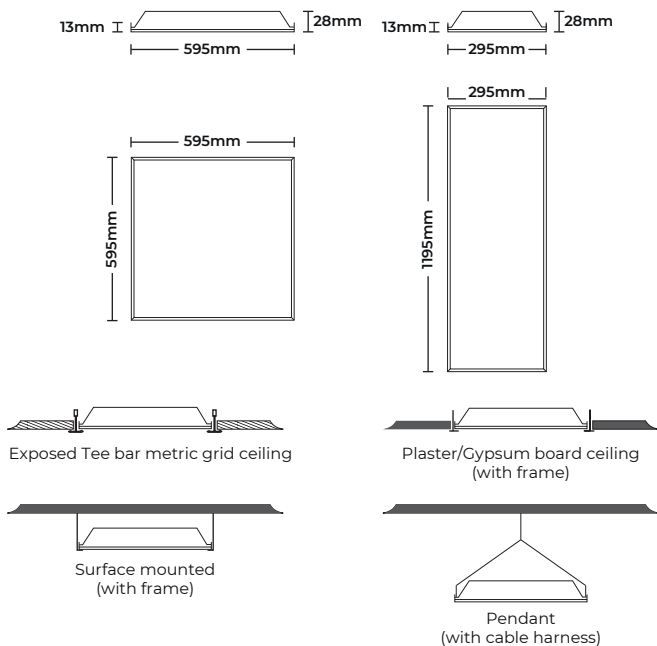

85	4000K	< 3
CRI(Ra)		SDCM
26W	3640 Lumens	26W
30W	3900 Lumens	30W
36W	4320 Lumens	36W
40W	4800 Lumens	40W

CCT Options:

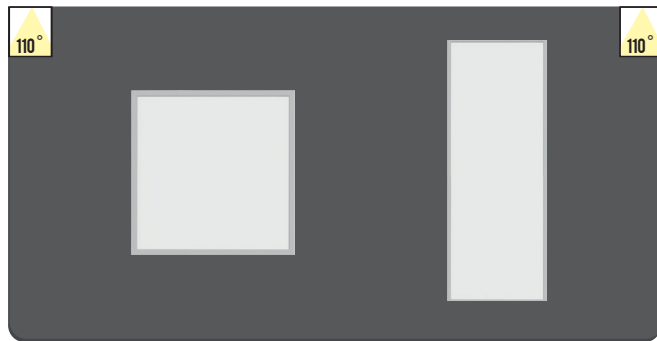

Diffuser Options:

1- Opal Diffuser(IP54) - OD01	1- Opal Diffuser(IP65) - OD02
UGR < 22(Standard)	UGR < 22(Standard)
2- Prismatic Diffuser(IP54) - PD01	2- Tempered Glass(IP65) - TG02
UGR < 19(Optional)	UGR < 22(Optional)
3- Anti Bacterial Diffuser(IP54) - ABD01	3- Anti Bacterial Diffuser(IP65) - ABD02
UGR < 22(Optional)	UGR < 22(Optional)

Features:

- Backlit LED panel luminaire for indoor recessed, surface and pendant mounting.
- Polystyrene diffuser for uniform, 110° beam distribution and UGR < 22 rating.
- Luminaire efficacy in the range of 120 to 140 Lumens/Watt.
- CRI Ra 85, CCT 4000K, SDCM<3.
- For Ta 40°C and 10 – 85% RH indoor operational environment.
- IP54 / IP50 rated optical and back sections.
- External on/off constant current IP20 rated, 220-240V-50/60Hz driver provided as standard offering. Low flicker operation.
- Plug and play type lockable connector for electrical connections between driver and panel.
- Screwless assembly of frame, diffuser and back housing for flatness, sturdiness and durability.
- Extruded Aluminum outer frame, SPCC steel single piece embossed back housing, powder paint coated to White RAL 9016 shade.
- Suitable for exposed Tee bar metric grid ceiling system in 600 x 600mm module dimensions for square (595 x 595 x 28mm) and 300 x 1200mm module dimensions for rectangular (295 x 1195 x 28mm) profiled panels.
- Possible to Install in gypsum/plasterboard false ceiling system by using recessed mounting frame accessory.
- Can be installed on non-combustible solid surfaces (ceiling and wall) in combination with surface mounting frames.
- Pendant mounting using cable harness set.
- L90B10@35°C lumen maintenance of 50,000 hours for LED light engine.

Ordering Guide:

Product	CCT	Wattage	Size(mm)	IP	Driver
MEL III	3K=3000K 4K=4000K 5K=5000K 5.7K=5700K 6.5K=6500K TW= (2700K-6500K) DTW= (1800K-3000K)	26W 30W 36W 40W	595=595x595x28	IP54 IP65	S=On/Off D=DALI 2 V=0-10V C=Casambi P=Push Dim T=Triac Dim
		26W 30W 36W 40W	1195=295x1195x28	IP54 IP65	


* Please choose wattage and luminaire size from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
MEL III-4K-26W-595-IP54-S	26W	4000K	3640lm	595 X 595 X 28
MEL III-4K-30W-595-IP54-S	30W	4000K	3900lm	595 X 595 X 28
MEL III-4K-36W-595-IP54-S	36W	4000K	4320lm	595 X 595 X 28
MEL III-4K-40W-595-IP54-S	40W	4000K	4800lm	595 X 595 X 28
MEL III-4K-26W-1195-IP54-S	26W	4000K	3640lm	295 X 1195 X 28
MEL III-4K-30W-1195-IP54-S	30W	4000K	3900lm	295 X 1195 X 28
MEL III-4K-36W-1195-IP54-S	36W	4000K	4320lm	295 X 1195 X 28
MEL III-4K-40W-1195-IP54-S	40W	4000K	4800lm	295 X 1195 X 28





* Please contact us for other CCT (3000K, 5000K, 5700K and 6500K), TW, DTW, CRI90, UGR<19, Dimming and Contron options.

Application:

Offices, education, healthcare, commercial, residential buildings , common areas and corridors.

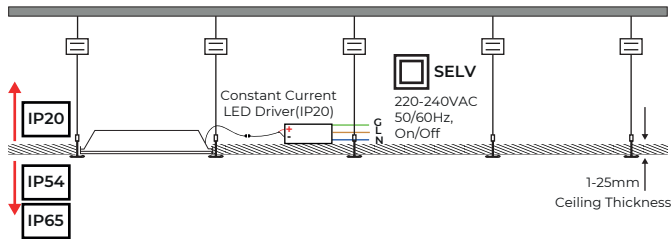

Polar Diagrams:

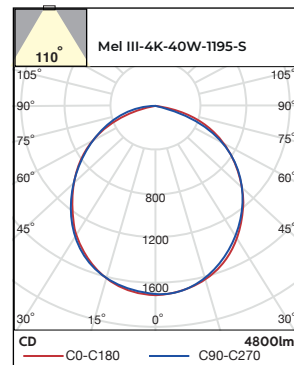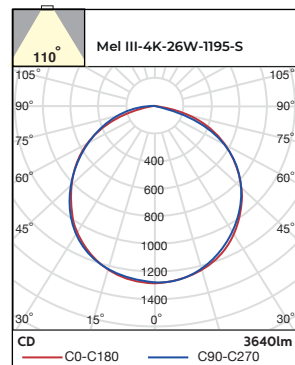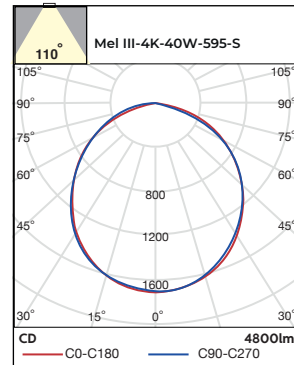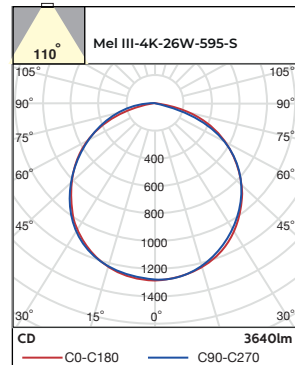

Options:



- CCT 3000K, 5000K, 5700K and 6500K.
- CRI Ra90.
- Diffuser and UGR Options.
- Customized RAL color shade of mounting frame meeting project specific requirements.
- Standard product is offered with combined cable plus lockable connector span of 300 mm (100 + 200 mm). Please specify required length of cable harness between driver and LED panel per site requirements.
- Tunable White (2700 – 6500K) and Dim to Warm (1800 – 3000K) feature and matching control.
- LED drivers from any specific brand and meeting any specific site requirements of THD, Flicker, Power Factor, Efficiency etc.
- Energy conservation control kit comprising of sensors (PIR, Daylighting), compatible drivers and controllers.
- Central battery compatible and self-contained versions for emergency lighting applications.
- DALI2, 0-10V, CASAMBI, Push to Dim and TRIAC Dim .



Accessories (Optional):

- Recessed mounting frames for gypsum plasterboard type ceilings.
- Surface mounting frames.
- Pendant mounting cable harness set.
- For ordering codes, please refer to the link given in "Details" section.

Application Photos:



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.