





Accessories

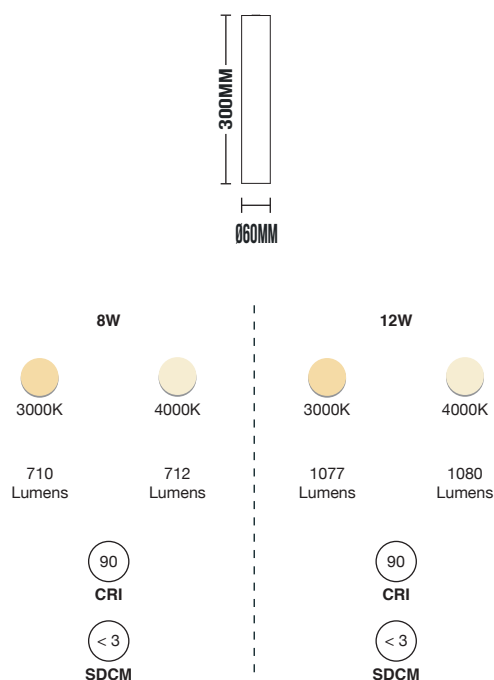

Installation:

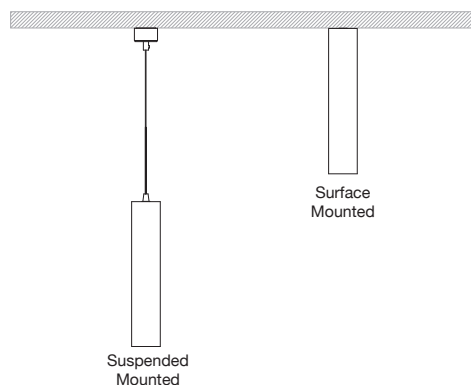

Benefits:

Cylindrical light creates a sophisticated and refined atmosphere.

Features:

Suspended or surfaced mounted light meets multiple lighting requirements.

Die-cast Aluminum alloy housing.

Electrostatic powder coating finish for aesthetics and durability.

Optical lens with spot, narrow and medium beam angles.

Interchangeable decoration ring with choice of black, white and gold colours.

Standard downlight range available in CCT options of 3000K and 4000K.

UGR<19 rated optical system.

Lumen maintenance up to 50,000 hours (L80B20@35°C).

Ordering Guide:

Product	CCT	Wattage	Body	Reflector	Driver
OPT	2.7K=2700K 3K=3000K 4K=4000K	8W 12W	W=White B=Black C=Customized	W=White G=Gold B=Black	S=On/Off T=TriacDim D=DALI V=0-10V C=Casambi

Product Code	WATTAGE	CCT	Lumens	Ø60 X 300
OPT-3K-8W-W-B-T	8W	3000K	710lm	Ø60 X 300
OPT-4K-8W-W-B-T	8W	4000K	712lm	Ø60 X 300
OPT-3K-12W-W-B-T	12W	3000K	1077lm	Ø60 X 300
OPT-4K-12W-W-B-T	12W	4000K	1080lm	Ø60 X 300


Application:

Offices, educational institutions, hospitality, healthcare facilities, modern retail, restaurants, shopping malls, corridors, washrooms, physical fitness facilities, dwelling units and other indoor commercial areas.

Options:

- Interchangeable White, Gold and Black reflector.
- CCT options of 2700K
- CRI 95
- Surface or Suspended mounting.

Application Photos:

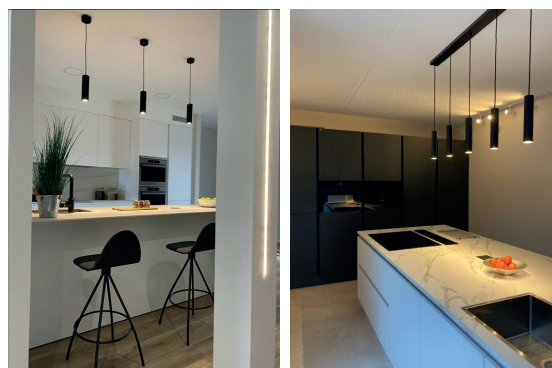

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.