

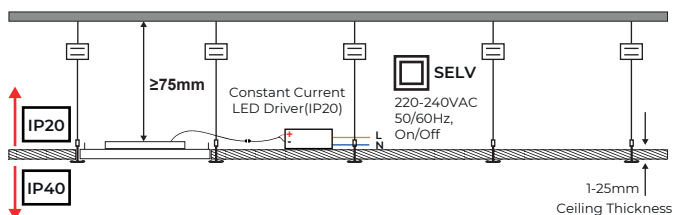





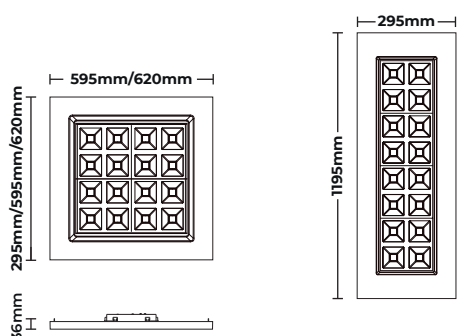

Beam Angle : 100°



Applications:

Offices, educational, healthcare, commercial, retail, residential buildings and indoor areas like reception, corridors, lift lobbies etc.

Application Photos:



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Square / Rectangle
Mounting Type	Recessed / Surface / Pendant
LED Type	SMD LED
Power Options	18W / 36W Customised wattage available from 26W to 36W in 595, 620 and 1195.
CCT(K) Options	3000K-5700K
Luminous Efficacy	130lm/W as standard 150lm/W as optional
Beam Angle	100°
CRI	>85
SDCM	< 3
UGR Control	UGR<16, L65<1000cd/m² as per EN 12464-1:2011
Lifespan	50,000 hours (L90 B10 @35°)

Physical

Housing	Steel Plate Cold Rolled Commercial
Housing Finish	White RAL9016
Optical Lens	Double parabolic reflector with lenses, low glare
Glow Wire Test	750°C
Dimension & Weight	595x295x36mm & 1.55Kgs 595x595x36mm & 2.90Kgs 620x620x36mm & 3.30Kgs 1195x295x36mm & 2.950Kgs

Environmental

Installation Environment	Indoor
IK Rating	04
IP Rating	IP40
Operating Temperature	-20° to 45°C
Humidity	0~90%

Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class II
Power Factor	>0.92
Standard	On/off
Dimming Options	DALI2 / 1-10V / CASAMBI

Ordering Guide:

Product	CCT	Wattage	Size(mm)	Driver
CFT II	3K=3000K 4K=4000K 5K=5000K 5.7K=5700K TW= (3000K-5700K)	18W	295=295x595x36	S=On/Off D=DALI 2 V=1-10V C=Casambi
		36W / Customised wattage	595=595x595x36	
			620=620x620x36	
			1195=1195x295x36	

* Please choose wattage and luminaire size from same color box matching respective product.
* Customised wattage available from 26W to 36W in 595, 620 and 1195mm.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
CFT II-4K-36W-595-S	36W	4000K	4680lm	595 X 595 X 36
CFT II-4K-36W-620-S	36W	4000K	4680lm	620 X 620 X 36

* Please contact us for other CCT(3000K, 5000K and 5700K) and Dimming control options.