


Bezel Finish Options:



Reflector Finish Options:

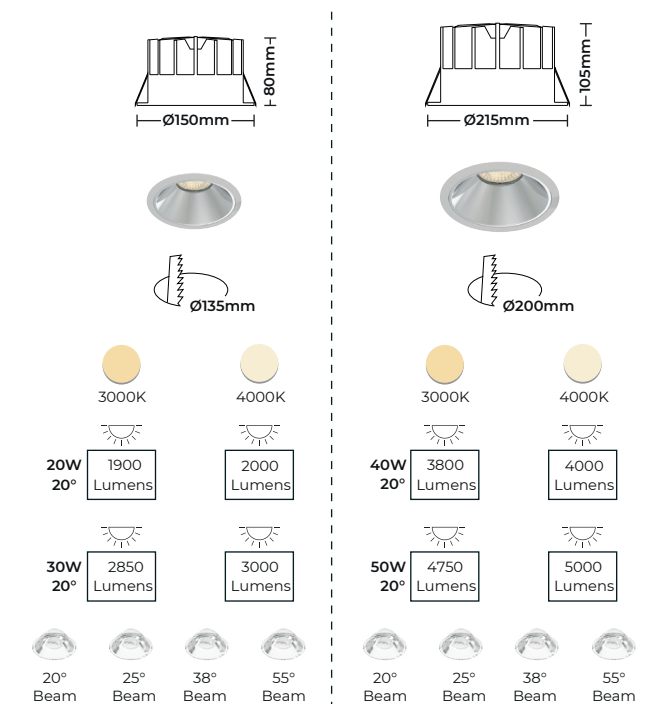

Key Information

Shape	Round
Mounting Type	Recessed
Mounting Location	Ceiling
Engine Orientation	Fixed
LED Type	COB LED
Power Options	20W 30W 40W 50W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
Luminous Efficacy	100LM/W(4000K)
Beam Angles	20° 25° 38° 55°
CRI	90(Standard) <95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical


Housing	Die cast aluminium body and heatsinks
Housing Finish	Electrostatic powder coating
Housing Color(Options)	White Black
Reflector	Aluminium
Reflector Color(Options)	White Black Silver
Diffuser	PMMA Optical lens
Clips	Steel
Glow Wire Test	850°C

Environmental

Installation Environment	Indoor
IK Rating	06
Operating Temperature	-20° to 45°C
IP Rating	IP65

Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class II
Power factor	>0.92
Standard	On/off
Dimming Options	DALI2 1-10V Triac CASAMBI



IP65

Applications:

Offices, hospitality, retail, restaurants, shopping malls, physical fitness facilities, healthcare, educational facilities, merchandise display areas, residential villas, penthouses, apartments, and other indoor commercial areas.




Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Bezel Finish	Reflector Finish	Driver
SR150	2.7K=2700K 3K=3000K 3.5K=3500K 4K=4000K 5K=5000K	20W 30W	20° 25° 38° 55°	W=White B=Black C=Custom	W=White B=Black S=Silver C=Custom	S=On/off D=DALI2 V=1-10V Tr=Triac C=CASAMBI
SR215		40W 50W				

Please choose product , wattage and beam angle from same color box matching respective product.

Product Code	Wattage	CCT (K)	Lumens	Dimensions (mm)
SR150-4K-20W-20°-W-W-S	20W	4000K	2000lm	Ø150 X 80
SR150-4K-30W-20°-W-W-S	30W	4000K	3000lm	Ø150 X 80
SR215-4K-40W-20°-W-W-S	40W	4000K	4000lm	Ø215 X 105
SR215-4K-50W-20°-W-W-S	50W	4000K	5000lm	Ø215 X 105

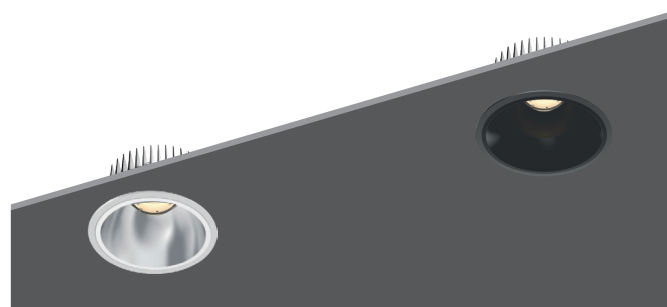

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.