




IP 65	IK 06	Ta 45°C	CRI Ra 85	VAC 220/240		CE	CB	
Beam Angles : 130°	1400-hour salt spray test passed			High-quality glass diffuser design				

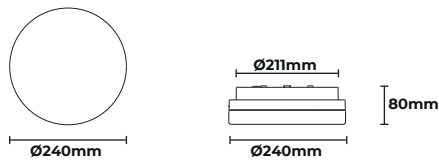

Mounting Options:

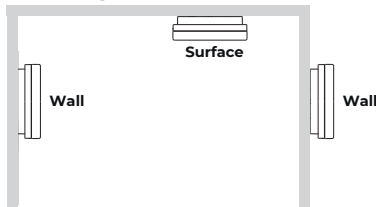

Photometric:

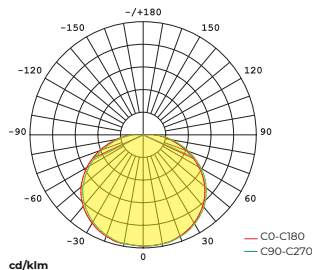

Applications:

Staircase, entrances, lobby, receptions, corridors, internal and external walls, living areas, bedroom, hall, dining room, kitchen and balconies etc.



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Round
Mounting Type	Surface mounted
LED Type	SMD LED module
Power Options	12W / 24W
CCT(K) Options	3000K/4000K(CCT Switchable)
Luminous Flux	1300lm / 2600lm(3000K)
Beam Angles	130°
CRI	>85
SDCM	< 3
Lifespan	50,000 hours(L70 B50)

Physical



Body Material	Die cast aluminium
Diffuser	High-quality tempered glass
Housing Finish	Electrostatic powder coating
Housing Color	Dark grey / Black / White / Silver
Dimension	Ø240 x 80mm
Weight	3.200Kgs

Environmental

Installation Environment	Indoor & Outdoor
IK Rating	06
IP Rating	IP65
Operating Temperature	-30° to 45°C

Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class I
Power Factor	>0.92
Standard	On/off
Dimming Options	DALI
Sensor Options	No



Ordering Guide:

Product	CCT (K)	Wattage (W)	Color Finish	Driver
LU = Lunar	SC = Switchable CCT (3000K/4000K)	12W 24W	DG=Dark grey B =Black W =White S =Silver	S=On/Off D=DALI
Product Code	Wattage	CCT	Lumens	Dimensions (mm)
LU-SC-12W-B-S	12W	3000K/4000K	1300/1330lm	Ø240 x 80mm
LU-SC-24W-B-S	24W	3000K/4000K	2600/2660lm	Ø240 x 80mm