



IP 65	IK 07	Ta 50°C	CRI Ra 85		VAC 220/240	CE	CB	
-------	-------	---------	-----------	--	-------------	----	----	--

Beam Angles : 18° | 25° | 40°



## Photometric:

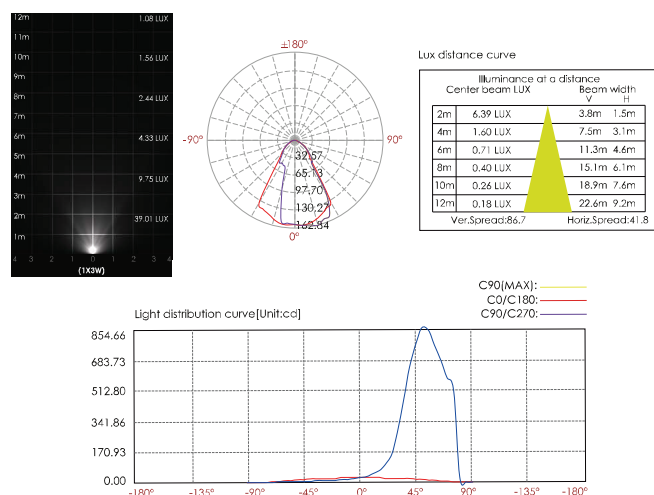

## Applications:

Building facade, exterior walls, pillars and outdoor applications.



## Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

## Key Information

Mounting Type	Wall mounted
LED Type	SMD LED module(Nichia)
Power Options	1x3W / 1x6W
CCT(K) Options	3000K / 4000K / 5000K
Luminous Efficacy	52lm/W
Beam Angles	18° / 25° / 40°
CRI	>85
Lifespan	50,000 hours(L90 B10 @35°)

## Physical

Body Material	Die-cast aluminium
Diffuser	Tempered glass
Housing Finish	Powder coating
Housing Color	Dark Grey - RAL7037 Silver Grey - RAL9022 Standard Black - RAL9005
Gasket	Tooling shaped seal
Power Cable	<b>3W / 6W:</b> 240VAC: H05RN-F 3x1.0mm², L=0.3m 24VDC: H05RN-F 2x1.0mm², L=0.3m

## Environmental

Installation Environment	Outdoor
IK Rating	07
IP Rating	IP65
Operating Temperature	-30° to 50°C

## Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class I
Power Factor	>0.92
Standard	On/off
Dimming Options	No

## Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Finish	Driver
RI I = Rina I	3K=3000K 4K=4000K 5K=5000K	3W 6W	18°   24°   40°	DG= Dark Grey SG= Silver Grey B= Black	S=On/Off

\* Please choose wattage from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
RI I-3K-3W-18°-SG-S	3W	3000K	156lm	100 X 90 X 82
RI I-3K-6W-18°-SG-S	6W	3000K	312lm	100 X 90 X 82

\* Please contact us for other CCT(4000K, 5000K) and Dimming control options.