

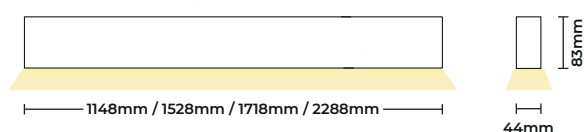


Beam Angles : 18° | 30° | 45°

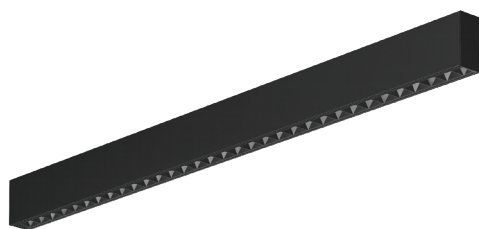

Mounting Options:

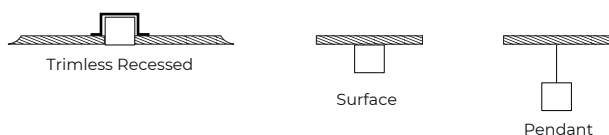

85
CRI(Ra)

<10
UGR

<3
SDCM


30W
1148mm
3000 lumens

40W
1528mm
4000 lumens

44W
1718mm
4400 lumens

60W
2288mm
6000 lumens

Polar Diagrams:

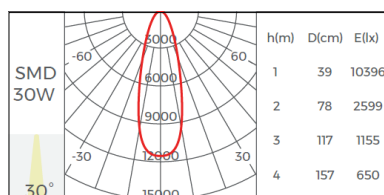

Application:

Office, meeting room, reception, education, super markets, shopping centers, residences, waiting areas, lobby, corridors, etc.



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Features:

- Sleek modern design aluminium profile with 44mm of width.
- Trimless recessed, surface mounted and pendant versions for indoor.
- Individual, continuous run and customised patterns.
- Provides continuous, dot free homogeneous light outputs.
- Extruded aluminium construction.
- High quality LED modules.
- PC louver diffuser.
- Easy and convenient to install and maintain.
- Standard product with luminous efficacy of 100 Lumens/Watt.
- 4000K, CRI Ra>85, SDCM<3, UGR<10.
- Working temperature range: -20°C to +45°C.
- Integral non-dimming driver (220-240VAC -50/60Hz, Class I).
- L80(B10)@25 °C 50,000 hours of LED light engine.

Ordering Guide:

Product	CCT (K)	Wattage (W)	Length (mm)	Beam Angle(°)	Color Finish	Driver
S44	3K=3000K 4K=4000K 5K=5000K 6.5K=6500K TW=2700K-6500K	30W	1148mm	18° 30° 45°	W=White B=Black	S=On/Off D=DALI2 V=1-10V C=CASAMBI
		40W	1528mm			
		44W	1718mm			
		60W	2288mm			
		CW= Customised Wattage	CL= Customised Length			

* Please choose wattage and length from same color box matching respective product.

Product Code	Wattage (W)	CCT	Lumens (lm)	Dimensions (mm)
S44-3K-30W-1148mm-30°-B-S	30W	3000K	3000lm	44 X 85 X 1148
S44-3K-40W-1528mm-30°-B-S	40W	3000K	4000lm	44 X 85 X 1528
S44-3K-44W-1718mm-30°-B-S	44W	3000K	4400lm	44 X 85 X 1718
S44-3K-60W-2288mm-30°-B-S	60W	3000K	6000lm	44 X 85 X 2288
S44-3K-CW-CL-30°-B-S	CW	3000K	XXXXlm	44 X 85 X CL

* Please contact us for other CCT, lengths and Dimming control options.

Options:

- Customised wattages and lumens
- CCT option of TW(3000K-6500K).
- Profile Paint finishes: White, Black and other RAL color shades.
- Dimming and control: DALI2, 1-10V, CASAMBI, Push Dim.



Accessories:



Suspension Kit with Junction Box
SK-01



Suspension Kit
SK-02



Pendant Rod
PR-01



Surface Mounted
SM-01



Splicing Bar
SB-01



L Shaped Corner (60°)
L60



L Shaped Corner (90°)
L90



L Shaped Corner (120°)
L120



Y Shaped Corner (120°)
Y120



X Shaped Corner (90°)
X90