




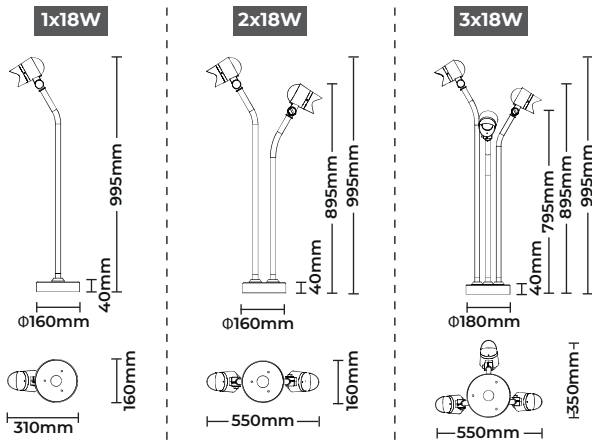


Beam : 15°, 24°, 33°, 45°, 60° - 7W  
 Angles : 15°, 20°, 35°, 50° - 18W

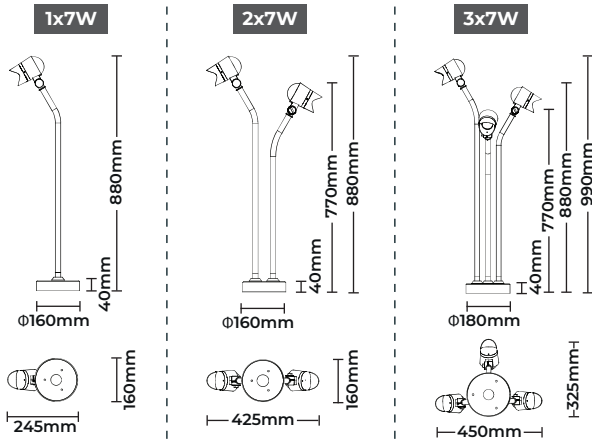

### Adjustable Angle:

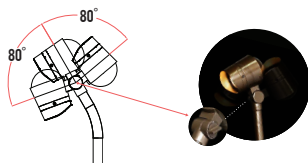

Vertical Rotation



Horizontal Rotation

## Key Information

Shape	Round
Mounting Type	Ground
LED Type	LED COB
Power Options	1x7W   2x7W   3x7W 1x18W   2x18W   3x18W
CCT(K) Options	3000K   4000K   5000K
Luminous Efficacy	105lm/W(7W) 101.67lm/W(18W)
Beam Angles	15°   24°   33°   45°   60° - (7W) 15°   20°   35°   50° - (18W)
CRI	>85 & +90(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

## Physical

Body Material	Extruded aluminium alloy #6063
Lens	Polycarbonate optical lens
Diffuser	Tempered glass . Thickness=3mm
Gasket	Tooling shaped seal
Housing Finish	Electrostatic powder coating
Housing Color Options	Sanded black (RAL 9005) Sanded grey (RAL 7043) Sanded Bronze (RAL7008)
Hood	Standard
Cable	IP68 PG-9 PA66
Power Cable	240VAC: H05RN-F 3x1.0mm <sup>2</sup> , L=0.3m 24VDC: H05RN-F 2x1.0mm <sup>2</sup> , L=0.3m

## Environmental

Installation Environment	Outdoor
IK Rating	07
IP Rating	IP66
Operating Temperature	-20° to 50°C

## Electrical

Input Voltage	220~240VAC 50/60Hz 24VDC ( as an option)
Standard	On/off
Dimming Options	DALI2   0-10V (Remote)

**Base Plate(Optional):**

**Inground Base(Option)**



CO-IB-01

**Ground Anchor Base(Option)**



CO-GB-01

**Housing Color:**



Sanded black  
RAL 9005  
(BL)



Sanded grey  
RAL 7043  
(G)



Sanded Bronze  
RAL 7008  
(BR)

**Applications:**

Exterior garden and landscape area, trees, plants, building facades, monuments, open spaces and pathway lighting

**Application Photo:**



**Ordering Guide:**

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Voltage	Color Finish	Driver
CO II= Cowra II	3K=3000K 4K=4000K 5K=5000K	1x7W 2x7W 3x7W	15°   24° 33°   45°   60°	240VAC	BL=Black BR=Bronze G=Grey	S=On/Off D=DALI2 V=0-10V
		1x18W 2x18W 3x18W	15°   20° 35°   50°	24VDC		

\* Please choose wattages and beam angle from same color box matching respective product.

**7W**

Product Code	Wattage	CCT	Lumens
CO II-3K-1x7W-24°-240VAC-B-S	1x7W	3000K	1x735lm
CO II-3K-2x7W-24°-240VAC-B-S	2x7W	3000K	2x735lm
CO II-3K-3x7W-24°-240VAC-B-S	3x7W	3000K	3x735lm

**18W**

Product Code	Wattage	CCT	Lumens
CO II-3K-1x18W-24°-240VAC-B-S	1x18W	3000K	1x1830lm
CO II-3K-2x18W-24°-240VAC-B-S	2x18W	3000K	2x1830lm
CO II-3K-3x18W-24°-240VAC-B-S	3x18W	3000K	3x1830lm

**Disclaimer:**

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.