





Beam Angles : 2° | 18° | 25° | 40°

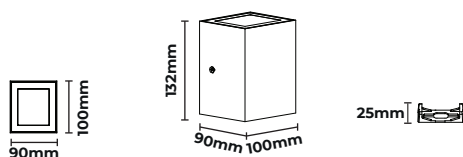


Photometric:



Lux distance curve

Center beam LUX	Beam width V	H
2m 28.35 LUX	1.8m	3.0m
4m 7.09 LUX	3.7m	6.0m
6m 3.15 LUX	5.5m	9.0m
8m 1.77 LUX	7.4m	12.0m
10m 1.13 LUX	9.3m	15.0m
12m 0.79 LUX	11.1m	18.0m

Ver.Spread:49.5 Horiz.Spread:73.8

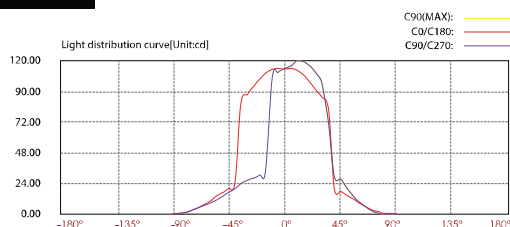

Applications:

Building facade, exterior walls, pillars and outdoor applications.



Key Information

Mounting Type	Wall mounted
LED Type	SMD LED module(Nichia)
Power Options	2x3W / 2x6W
CCT(K) Options	3000K / 4000K / 5000K
Luminous Efficacy	52lm/W
Beam Angles	2° / 18° / 25° / 40°
CRI	>85
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Body Material	Die-cast aluminium
Diffuser	Tempered glass
Housing Finish	Powder coating
Housing Color	Dark Grey - RAL7037 Silver Grey - RAL9022 Standard Black - RAL9005
Gasket	Tooling shaped seal
Power Cable	6W / 12W: 240VAC: H05RN-F 3x1.0mm², L=0.3m 24VDC: H05RN-F 2x1.0mm², L=0.3m

Environmental

Installation Environment	Outdoor
IK Rating	07
IP Rating	IP65
Operating Temperature	-30° to 50°C

Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class I
Power Factor	>0.92
Standard	On/off
Dimming Options	DALI2 / 1-10V

Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Finish	Driver
RI II = Rina II	3K=3000K 4K=4000K 5K=5000K	6W 12W	2° 18° 25° 40°	DG= Dark Grey SG= Silver Grey B= Black	S=On/Off D=DALI 2 V=1-10V

* Please choose wattage from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
RI II-3K-6W-18°-S-S	2x3W	3000K	2x156lm	100 X 90 X 132
RI II-3K-12W-18°-S-S	2x6W	3000K	2x312lm	100 X 90 X 132

* Specify upward and downward beam angles.

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.