




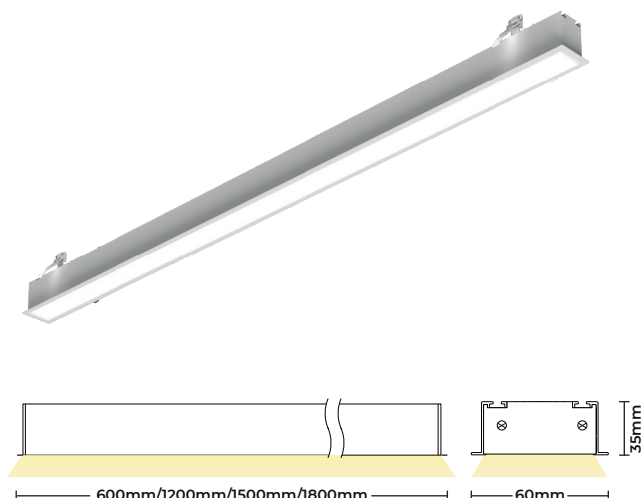


Mounting options:




85 CRI(Ra)	4000K	<3 SDCM
20W 2000 lumens 600mm length	40W 4000 lumens 1200mm length	
50W 5000 lumens 1500mm length	60W 6000 lumens 1800mm length	



Black




Silver



White

Polar Diagram:

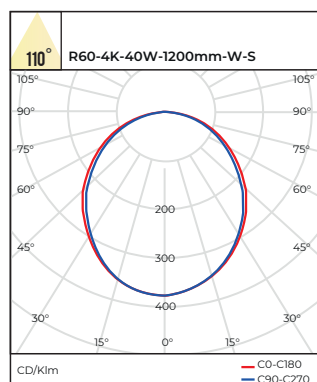

Benefits:

LED Profiles Lights in today's world are an indoor light choice. It is a perfect lighting solutions which provides an attractive and adaptable design which seamlessly integrates into the architecture for a more aesthetically pleasing design.

Features:

- Sleek modern design aluminium profile with 60mm of width.
- Versatile profile suitable for indoor recessed applications.
- Offered in four individual lengths (600, 1200, 1500, 1800mm) and wattages (20W, 40W, 50W, 60W) to cater to diverse indoor uses.
- Individual, continuous run and customised patterns.
- Provides continuous, dot free homogeneous light outputs.
- Extruded aluminum construction.
- High quality LED modules.
- Flexible PC opal diffuser.
- Plug and play system with factory fitted components for quick installation.
- Working temperature range: -20°C to +40°C.
- 4000K CCT, CRI Ra 85, SDCM<5 UGR<26, Beam Angle 110°.
- Standard product with luminous efficacy of 100 Lumens/Watt.
- Remote mounted, constant voltage driver configuration; 220-240VAC 50/60Hz, Class II, on/off as standard offering.
- L90(B10) 50,000hours of LED light engine.

Ordering Guide:

Product	CCT (K)	Wattage (W)	Length (mm)	Color Finish	Driver
R60	3K=3000K 4K=4000K 5K=5000K 6.5K=6500K TW=3000K-5000K	20W	600mm	W=White B=Black S=Silver C=Custom	S=On/Off D=DALI2 V=1-10V C=CASAMBI
		40W	1200mm		
		50W	1500mm		
		60W	1800mm		
		CW= Customized Wattage	CL= Customized Length		

* Please choose wattage and length from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
R60-4K-20W-600mm-W-S	20W	4000K	2000lm	60 X 35 X 600
R60-4K-40W-1200mm-W-S	40W	4000K	4000lm	60 X 35 X 1200
R60-4K-50W-1500mm-W-S	50W	4000K	5000lm	60 X 35 X 1500
R60-4K-60W-1800mm-W-S	60W	4000K	6000lm	60 X 35 X 1800

* Please contact us for other CCT(3000K, 5000K, 6500K and TW), lengths and Dimming control options.

Application:


Offices, education, retail, super markets, shopping centers, residences, common indoor areas, reception, waiting areas, lift lobby, corridors, collaborative spaces, etc.

Options:

- Luminous efficacy options of 100 and 120 Lumens/Watt.
- CRI (Ra) 90.
- Profile Paint finishes: White, Black and other RAL color shades.
- LED driver from any specific brand and specifications, meeting project requirements.



Recessed Bracket
(Butterfly)
RB60




Joiner
J60


Configurations:

Individual

Continuous



Straight Joiner for continuous

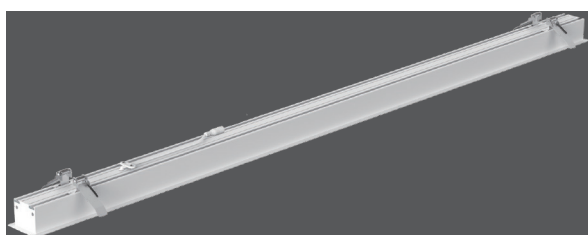

- Emergency light version.
- Dimming and control: DALI2, 1-10V, CASAMBI, Push Dim.



Accessories (Optional):

- Recessed bracket(RB60).
- Joiner(J60).

Note:

For individual, continuous run and customised patterns, we provide our comprehensive services from conceptualization to final commissioning. Please share your requirements with us to offer you the solution.

Application Photo:



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.