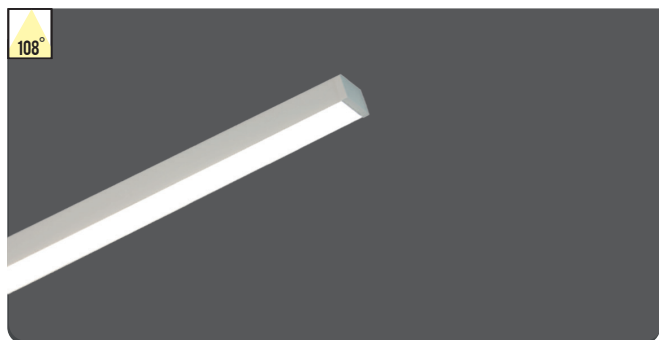


Features:

- LED Linear profile completely sealed to IP65.
- Provides continuous, dot-free homogeneous light output.
- Could be installed on recessed, ceiling, wall and pendant mounted.
- Aluminium housing has excellent heat radiation with long lifespan.
- Reflector makes high reflective coating layer to provide higher lighting efficacy.
- High quality LED modules with CRI 85 as standard.
- Luminaire efficacy in the range of 95 Lumens/Watt.
- IK08 impact resistant construction.
- PC diffuser with 108Deg beam angle.
- Housing Colors : white, black and silver as standard.
- Integral driver (220-240VAC -50/60Hz, Class I) in on/off (standard offering), DALI2 and 1-10V versions. Low flicker operation.
- Ease of installation and quick dismantling for maintenance.
- L90B10@35°C lumen maintenance up to 50,000 hours for LED light engine.

Ordering Guide:


Product	CCT	Wattage	Size(mm)	Color Finish	Driver
Wet50	3K=3000K	31W	1232	B=Black W=White S=Silver C=Customized	S=On/Off D=DALI 2 V=0-10V
	3.5K=3500K				
	4K=4000K	46W	1841		
	5K=5000K	61W	2449		
	6K=6500K				

* Please choose wattage and luminaire size from same color box matching respective product.



Product Code	Wattage	CCT	Lumens	Dimensions (mm)
Wet50-4K-31W-1232-W-S	31W	4000K	2936lm	50 X 80 X 1232
Wet50-4K-46W-1841-W-S	46W	4000K	4404lm	50 X 80 X 1841
Wet50-4K-61W-2449-W-S	61W	4000K	5872lm	50 X 80 X 2449

* Please contact us for other CCT (3000K, 5000K, 5700K and 6500K), CRI90, and Dimming/Control options.

Mounting options:

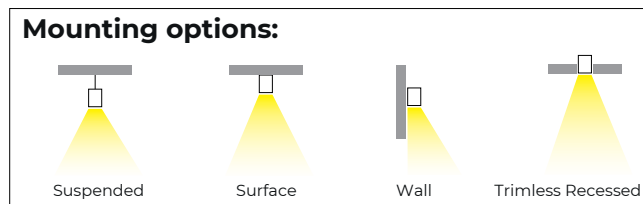

Polar Diagram:

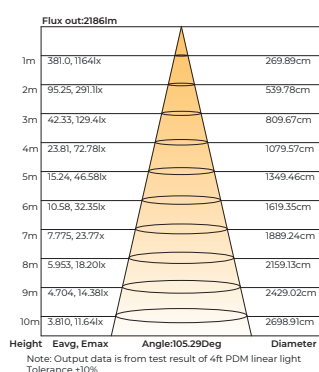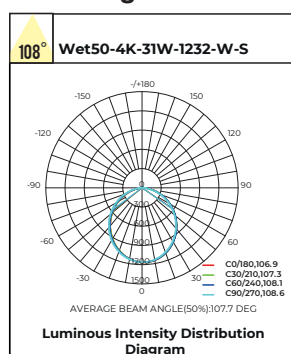

Accessories(Optional):



Suspension Kits
SK50



Surface Mounted Bracket
SMB50



Wall Mounted Bracket
WMB50



Trimless Recessed Bracket
TRB50

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Application:

Airports, train stations, bus stations, malls, educational facilities, healthcare, swimming pools, pergolas and exterior applications.

Options:

- CCT 3000K, 3500K, 5000K and 6000K.
- CRI Ra90.
- Dimming and control: DALI2, 1-10V.



Application Photo:

