
# Spento WW | LED Recessed Wall Washer Downlight

LuxeLED®

UGR < 19 | IP 54 | Ta 45 °C | CRI Ra 85 | IK 06

Beam Angles : 80°(Asymmetric 30°)











| Wattage(W) | Dimension A x H(mm) | Cutout(mm) |
|---|---|---|
| 8W/10W | Ø110mm x 54mm | Ø95mm |
| 10W/13W | Ø145mm x 78mm | Ø125mm |

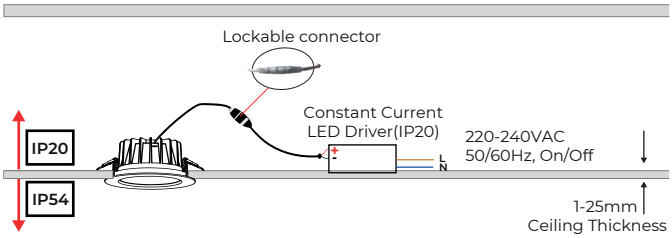



**Bezel and Reflector Finish Options:**


White Trim and Silver Reflector Faceted


White Trim and Silver Reflector Matte


White Trim and White Reflector


White Trim and Black Reflector

**Applications:**
Residential, hospitality, offices, educational, office, supermarket, shop, hotel, healthcare , stairway, lobby, reception, corridors and entertainment.



## Key Information

| | |
|---|---|
| **Shape** | Round |
| **Mounting Type** | Recessed |
| **Mounting Location** | Ceiling |
| **Engine Orientation** | Fixed |
| **LED Type** | COB LED |
| **Power Options** | 8W \| 10W \| 13W |
| **CCT(K) Options** | 2700K \| 3000K \| 4000K \| 5000K |
| **Luminous Efficacy** | 81lm/W |
| **Beam Angles** | 80°(Asymmetric 30°) |
| **CRI** | >85 & +90(Optional) |
| **SDCM** | < 3 |
| **Lifespan** | 50,000 hours (L90/B10 at 35°C) |

## Physical


| | |
|---|---|
| **Housing** | Die-cast aluminium |
| **Housing Finish** | Electrostatic powder coating |
| **Reflector** | Aluminium |
| **Reflector Options** | White \| Black \| Faceted Silver Matte Silver |
| **Optical Lens** | PC |
| **Glow Wire Test** | 750°C |

## Environmental

| | |
|---|---|
| **Installation Environment** | Indoor |
| **IK Rating** | 06 |
| **Operating Temperature** | -20° to 45°C |
| **IP Rating** | IP54 |

## Electrical

| | |
|---|---|
| **Input Voltage** | 220~240VAC 50/60Hz |
| **Standard** | On/off |
| **Dimming Options** | DALI2 \| 1-10V \| Triac |

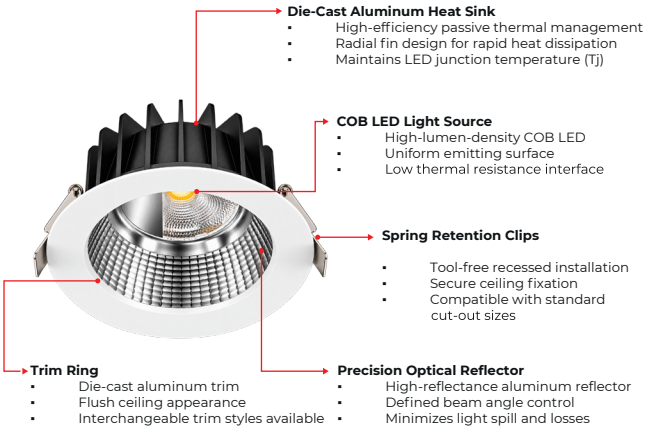

## Ordering Guide:

| Product | Dia(mm) | Wattage (W) | CCT (K) | Housing Bezel Finish | Reflector Finish | Driver |
|---|---|---|---|---|---|---|
| SP WW = Spento WW | D110 | 8W \| 10W | 2.7K=2700K<br>3K=3000K<br>4K=4000K<br>5K=5000K | W=White<br>B =Black | W=White<br>B=Black<br>FS=Faceted Silver<br>MS=Matte Silver | S=On/off<br>D=DALI2<br>V=1-10V<br>Tr=Triac |
| | D145 | 10W \| 13W | | | | |

Please choose Dia and wattage from same color box matching respective product.

| Product Code | Wattage | CCT (K) | Lumens | Dimensions (mm) |
|---|---|---|---|---|
| SP WW-D110-8W-3K-W-W-S | 8W | 3000K | 648lm | Ø110 X 54 |
| SP WW-D110-10W-3K-W-W-S | 10W | 3000K | 810lm | Ø110 X 54 |
| SP WW-D145-10W-3K-W-W-S | 10W | 3000K | 810lm | Ø145 X 78 |
| SP WW-D145-13W-3K-W-W-S | 13W | 3000K | 1053lm | Ø145 X 78 |

* Please contact us for other CCT(2700K, 3000K and 5000K) and Dimming control options.

**Disclaimer:**
LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.