





Beam Angles : 15°, 20°, 25°, 38°, 55°



Wattage(W)	Lumens(LM)	Dimension ØD x H(mm)	Cut out(mm)
10W 12W	1000LM 1200LM	Ø85mm x 55mm	Ø75mm
15W 18W	1500LM 1800LM	Ø105mm x 65mm	Ø95mm
20W 25W	2000LM 2500LM	Ø130mm x 75mm	Ø115mm
30W 35W	3000LM 3500LM	Ø150mm x 80mm	Ø135mm
40W 50W	4000LM 5000LM	Ø190mm x 95mm	Ø175mm
50W 60W	5000LM 6000LM	Ø215mm x 105mm	Ø200mm

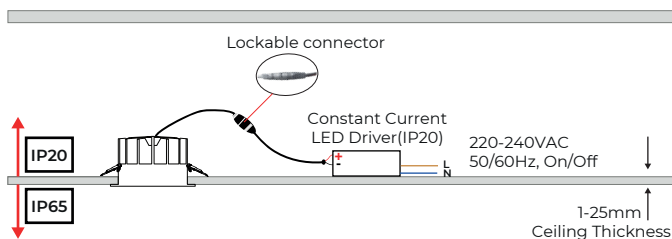

Bezel Finish Options:



White(W)



Black(B)

Reflector Finish Options:



White(W)



Black(B)



Silver(S)

Key Information

Shape	Round
Mounting Type	Recessed
Mounting Location	Ceiling
Engine Orientation	Fixed
LED Type	COB LED
Power Options	10W 12W 15W 18W 20W 25W 30W 35W 40W 50W 60W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
Luminous Efficacy	100lm/W(4000K)
Beam Angles	15° 20° 25° 38° 55°
CRI	90(Standard) <95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Housing	Die cast aluminium body and heatsinks
Housing Finish	Electrostatic powder coating
Housing Color(Options)	White Black
Reflector	Aluminium
Reflector Color(Options)	White Black Silver
Diffuser	PMMA Optical lens
Clips	Steel
Glow Wire Test	850°C

Environmental

Installation Environment	Indoor
IK Rating	06
Operating Temperature	-20° to 45°C
IP Rating	IP65

Electrical

Input Voltage	220~240VAC 50/60Hz
Standard	On/off
Dimming Options	DALI2 1-10V Triac CASAMBI



IP65

Applications:

Offices, hospitality, retail, restaurants, shopping malls, physical fitness facilities, healthcare, educational facilities, merchandise display areas, residential villas, penthouses, apartments, and other indoor commercial areas.



Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Bezel Finish	Reflector Finish	Driver
SR85	2.7K=2700K 3K=3000K 3.5K=3500K 4K=4000K 5K=5000K	10W 12W	15° 20° 25° 38° 55°	W=White B=Black C=Custom	W=White B=Black S=Silver C=Custom	S=On/off D=DALI2 V=1-10V Tr=Triac C=CASAMBI
SR105		15W 18W				
SR130		20W 25W				
SR150		30W 35W				
SR190		40W 50W				
SR215		50W 60W				

Please choose product , wattage and beam angle from same color box matching respective product.

Product Code	Wattage	CCT (K)	Lumens	Dimensions (mm)
SR85-4K-10W-20°-W-W-S	10W	4000K	1000lm	Ø85 X 58
SR85-4K-12W-20°-W-W-S	12W	4000K	1200lm	Ø85 X 58
SR105-4K-15W-20°-W-W-S	15W	4000K	1500lm	Ø105 X 65
SR105-4K-18W-20°-W-W-S	18W	4000K	1800lm	Ø105 X 65
SR130-4K-20W-20°-W-W-S	20W	4000K	2000lm	Ø130 X 75
SR130-4K-25W-20°-W-W-S	25W	4000K	2500lm	Ø130 X 75
SR150-4K-30W-20°-W-W-S	30W	4000K	3000lm	Ø150 X 80
SR150-4K-35W-20°-W-W-S	35W	4000K	3500lm	Ø150 X 80
SR190-4K-40W-20°-W-W-S	40W	4000K	4000lm	Ø190 X 95
SR190-4K-50W-20°-W-W-S	50W	4000K	5000lm	Ø190 X 95
SR215-4K-50W-20°-W-W-S	50W	4000K	5000lm	Ø215 X 105
SR215-4K-60W-20°-W-W-S	60W	4000K	6000lm	Ø215 X 105



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.