


# Power Spot III | LED RGBW Flood Light


LuxeLED®



Beam Angles : 10°, 15°, 20°, 30°, 15x60°

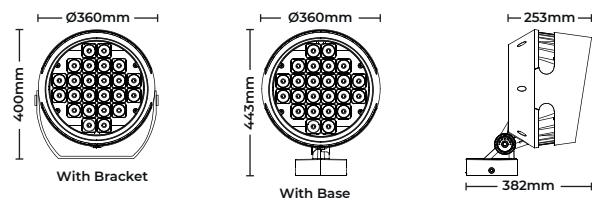

## Wiring Informations:



## Applications:

Facade, statues, land marks, columns, pillars and outdoor applications



## Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

## Key Information

Shape	Round
Mounting Type	Surface mounted
Engine Orientation	Adjustable
LED Type	LED SMD module(4 in 1)
LED Number	24
Power	200W / 240W / 300W
CCT(K) Options	RGBW
Luminous Efficacy	51LM/W
Beam Angles	10°, 15°, 20°, 30°, 15x60°
CRI	-
Lifespan	50,000 hours(L90 B10 @35°)

## Physical

Housing	Die cast aluminium
Housing Finish	Electrostatic powder coating
Housing Color(Options)	Dark grey
Lens	PC optical lens
Diffuser	Tempered glass
Glow Wire Test	850°C
Dimension	Ø 360 X 443mm

## Environmental

Installation Environment	Outdoor
IK Rating	08
IP Rating	IP66
Operating Temperature	-20° to 50°C
Humidity	10~90%
Weight	10.5Kgs

## Driver

Input Current	220~240VAC 50/60Hz
Class Rating	Class I
Control	DMX512 / RDM

## Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Bezel Finish	Driver
Power Spot III =PS III	RGBW	200W	10°	G=Grey B=Black C=Custom	DX=DMX512
		240W	15°		
		300W	20°		
			30°		
			15x60°		

\*\* Please choose wattages from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
PSIII-RGBW-200W-10°-G-DX	200W	RGBW	10710lm	Ø360 X 443
PSIII-RGBW-240W-10°-G-DX	240W	RGBW	12240lm	Ø360 X 443
PSIII-RGBW-300W-10°-G-DX	300W	RGBW	15300lm	Ø360 X 443