




Beam Angles : 18° | 28° | 38°

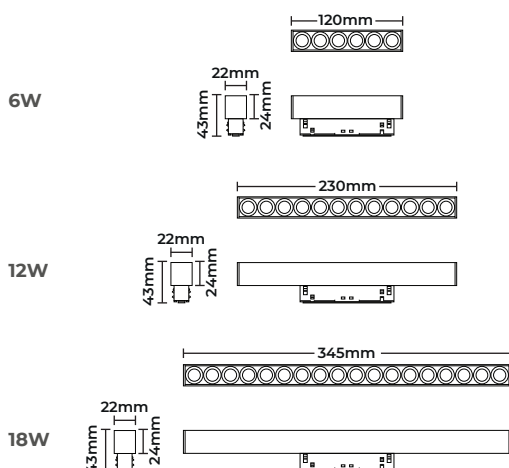

Applications:

Hospitality, retail, recreational facilities, restaurants, offices, education, healthcare, residential villas, contemporary dwelling units including penthouses, condominiums, apartments and residential towers.



Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Linear
Mounting Type	Track Mounted
LED Type	SMD LED module
Power Options	6W 12W 18W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
Luminous Efficacy	80-90lm/W
Beam Angles	18° 28° 38°
CRI	90(Standard) 95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Body Material	Die cast aluminium
Reflector	Aluminium
Optics	Lens
Housing Finish	Electrostatic powder coating
Housing Color	Black as standard White(Optional)


Environmental

Installation Environment	Indoor
IP Rating	IP20
Operating Temperature	-20° ~ 35°C

Driver

Voltage	48VDC
Class Rating	Class II
Power Factor	>0.95
Standard	On/off
Dimming Options	0-10V DALI2

Track Options:

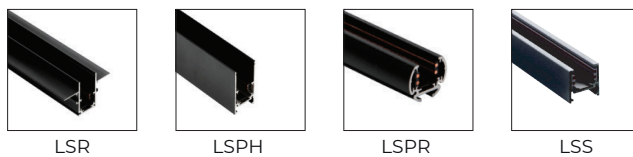

Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Length(mm)	Housing Finish	Driver
LSA	2.7K=2700K	6W	18° 28° 38°	120mm	B=Black W=White C=Custom	S=On/Off D=DALI 2 V=0-10V
	3K=3000K	12W		230mm		
	3.5K=3500K	18W		345mm		
	4K=4000K					
	5K=5000K					

* Please choose wattage and length from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
LSA-3K-6W-18°-120mm-B-S	6W	3000K	500lm	120 X 22 X 43
LSA-3K-12W-18°-230mm-B-S	12W	3000K	1000lm	230 X 22 X 43
LSA-3K-18W-18°-345mm-B-S	18W	3000K	1500lm	345 X 22 X 43

* Please contact us for other CCT(2700K, 3500K 4000K and 5000K) and Dimming control options.