






Beam Angles : 110°




Sizes and Wattages:

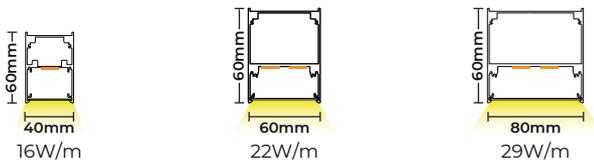

Sizes and Wattages:

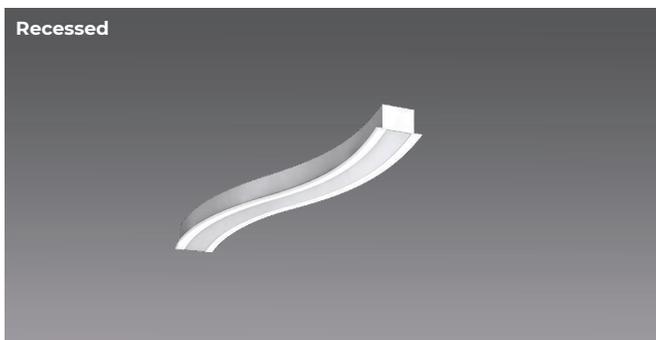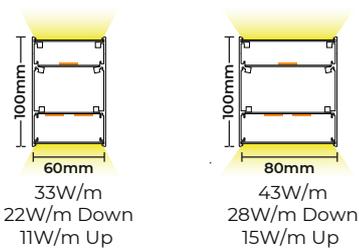

Sizes and Wattages:

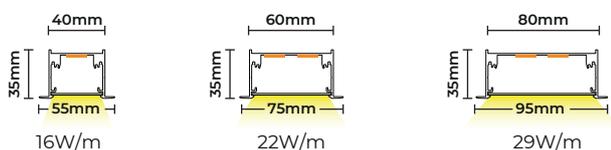

Key Information

Shape	Linear
Mounting Type	1. Surface 2. Pendant 3. Recessed 4. Trimless
LED Type	SMD LED module
CCT(K) Options	3000K 4000K 6000K
Luminous Efficacy	80-110lm/W
Beam Angles	110°
CRI	>85(Standard)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Body Material	Extruded aluminium
Diffuser	PC
Housing Finish	Electrostatic powder coating
Housing Color	White as standard Silver Black


Environmental

Installation Environment	Indoor
IP Rating	IP40
Operating Temperature	-20° ~ 40°C

Electrical

Input Voltage	220-240VAC 50/60Hz
Standard	On/off
Dimming Options	1-10V DALI2

Mounting options:

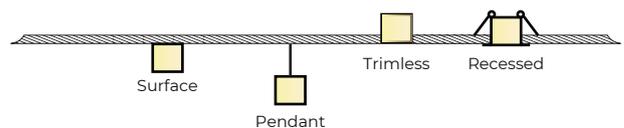

Standard Linear Length:



- arc:
1. R300mm
 2. R450mm
 3. R600mm
 4. R900mm
 5. R1200 mm

Note:

For custom curved, straight shapes and other configurations, we provide our comprehensive services from conceptualization to final commissioning. Please share your requirements with us to offer you the solution.

Accessories:



Pendant
(P01)



Recessed
(R01)



Straight Joiner
(SJ01)




Curve Joiner
(CJ01)



Straight Joiner
Up and Down
(SJ02)

Configurations:

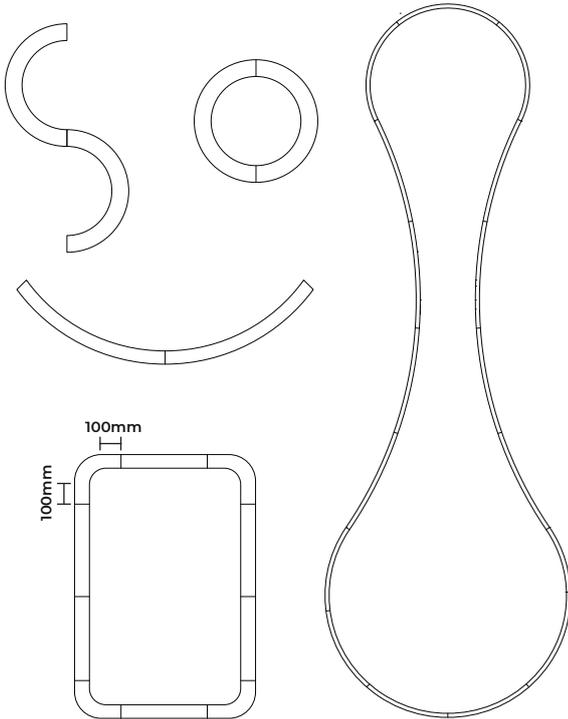

Application Photos:



Ordering Guide:

Product	Mounting	CCT	Wattage(W/m)	Color Finish	Driver
CS40 CS60 CS80	S = Suspended P = Pendant TR = Trimless Recessed	3K=3000K 4K=4000K 6K=6000K	16W/m	W=White B=Black S=Silver C=Custom	S=On/Off D=DALI2 V=1-10V C=CASAMBI
			22W/m		
			29W/m		
			43W/m		
CS55 CS75 CS95	R = Recessed		16W/m		
			22W/m		
			28W/m		
CS60 CS80	DI = Direct & Indirect		33W/m		
			43W/m		
			66W/m		

* Please choose Product, mounting and wattage from same color box matching respective product.

Product Code and Parameters:

S = Suspended
P = Pendant
TR = Trimless Recessed

Product Code	Wattage(W/m)	Voltage	CCT(K)	CRI(Ra)	Lumen Flux (LM/m)	Dimensions(mm)
CS40-S-3K-16W/m-W-S	16W/m	220-240VAC	3000K	> 85	1600	40 x 60 x 1000mm
CS60-S-3K-22W/m-W-S	22W/m	220-240VAC	3000K	> 85	2200	60 x 60 x 1000mm
CS80-S-3K-29W/m-W-S	29W/m	220-240VAC	3000K	> 85	2900	80 x 60 x 1000mm

Product Code and Parameters:

R = Recessed

Product Code	Wattage(W/m)	Voltage	CCT(K)	CRI(Ra)	Lumen Flux (LM/m)	Dimensions(mm)
CS55-R-3K-16W/m-W-S	16W/m	220-240VAC	3000K	> 85	1600	55 x 35 x 1000mm
CS75-R-3K-22W/m-W-S	22W/m	220-240VAC	3000K	> 85	2200	75 x 35 x 1000mm
CS95-R-3K-29W/m-W-S	29W/m	220-240VAC	3000K	> 85	2900	95 x 35 x 1000mm

Product Code and Parameters:

DI = Direct & Indirect

Product Code	Wattage(W/m)	Voltage	CCT(K)	CRI(Ra)	Lumen Flux (LM/m)	Dimensions(mm)
CS60-DI-3K-33W/m-W-S	33W/m (22W/m↓ & 11W/m↑)	220-240VAC	3000K	> 85	3300 (2200↓ & 1100↑)	60 x 100 x 1000mm
CS80-DI-3K-43W/m-W-S	43W/m (28W/m↓ & 15W/m↑)	220-240VAC	3000K	> 85	4300 (2800↓ & 1500↑)	80 x 100 x 1000mm

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.