



Product Images:

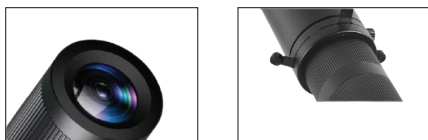

Applications:

Hospitality, retail, recreational facilities, restaurants, offices, education, healthcare, residential villas, contemporary dwelling units including penthouses, condominiums, apartments and residential towers.

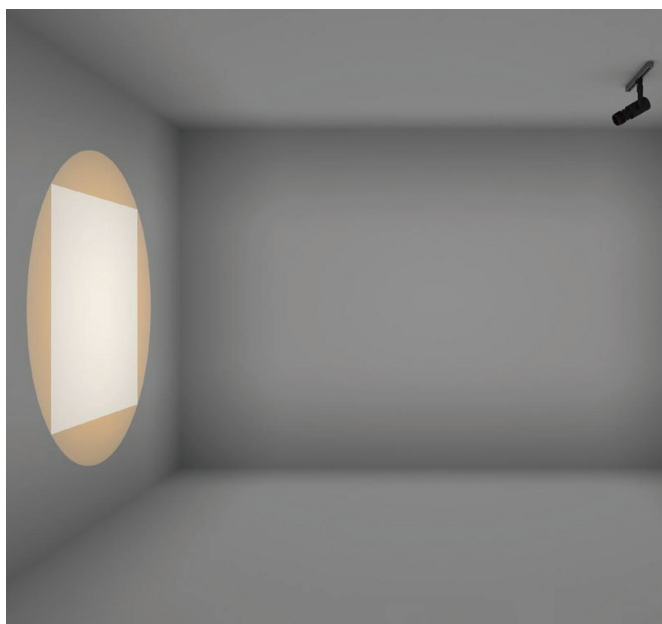

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Round
Mounting Type	Track Mounted
LED Type	LED COB
Power Options	3W 10W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
CRI	90(Standard) 95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Body Material	Die cast aluminium
Reflector	Aluminium
Diffuser	Pro Museum Lens + Cutting Film
Housing Finish	Electrostatic powder coating
Housing Color	Black as standard White(Optional)


Environmental

Installation Environment	Indoor
IP Rating	IP20
Operating Temperature	-20° ~ 35°C

Driver

Input Voltage	48VDC
Class Rating	Class II
Power Factor	>0.95
Standard	On/off
Dimming Options	0-10V DALI2

Track Options:

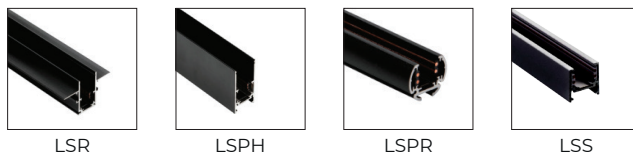

Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Dia(mm)	Housing Finish	Driver
LSQ	2.7K=2700K 3K=3000K 3.5K=3500K 4K=4000K 5K=5000K	3W	-	Ø23mm	B=Black W=White C=Custom	S=On/Off D=DALI 2 V=0-10V
		10W		Ø38mm		

* Please choose wattage and Dia from same color box matching respective product.

Product Code	Wattage	CCT	Dimensions (mm)
LSQ-3K-3W-Ø23mm-B-S	3W	3000K	Ø23 x 76
LSQ-3K-10W-Ø38mm-B-S	10W	3000K	Ø38 x 154

* Please contact us for other CCT(2700K, 3500K 4000K and 5000K) and Dimming control options.