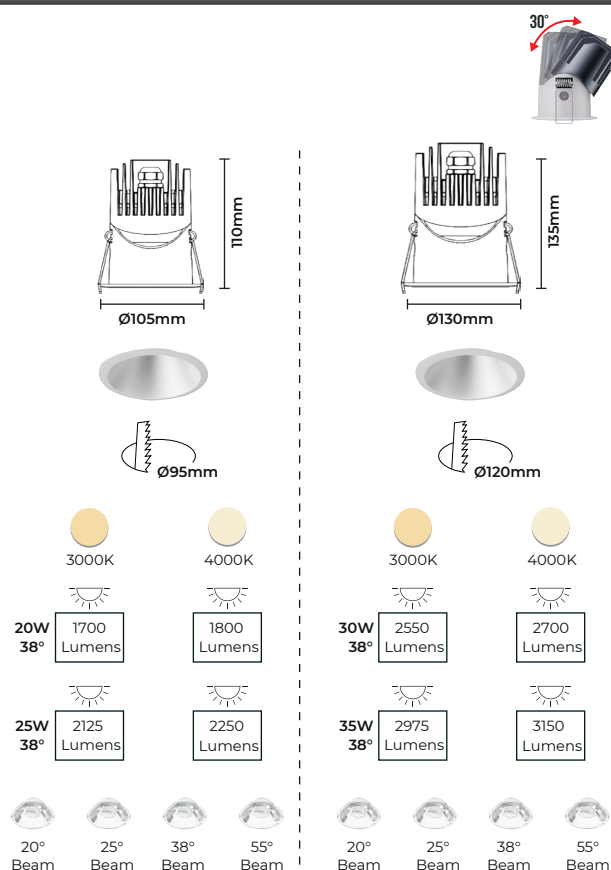


Key Information

Shape	Round
Mounting Type	Recessed
Mounting Location	Ceiling
Engine Orientation	Adjustable
LED Type	COB LED
Power Options	20W 25W 30W 35W
CCT(K) Options	2700K 3000K 3500K 4000K 5000K
Luminous Efficacy	90lm/W(4000K)
Beam Angles	20° 25° 38° 55°
CRI	90(Standard) <95 and Thrive(Optional)
SDCM	< 3
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Housing	Die cast aluminium body and heatsinks
Housing Finish	Electrostatic powder coating
Housing Color(Options)	White as standard Black(Optional)
Reflector	High quality aluminium reflector
Reflector Color(Options)	White
Diffuser	PMMA Optical lens
Clips	Steel
Tilt	30°
Glow Wire Test	850°C

Environmental

Installation Environment	Indoor
IK Rating	06
Operating Temperature	-20° to 45°C
IP Rating	IP65

Driver

Input Voltage	220~240VAC 50/60Hz
Class Rating	Class II
Power factor	>0.92
Standard	On/off
Dimming Options	DALI2 1-10V Triac CASAMBI



IP65

Applications:

Offices, hospitality, retail, restaurants, shopping malls, physical fitness facilities, healthcare, educational facilities, merchandise display areas, residential villas, penthouses, apartments, and other indoor commercial areas.



Ordering Guide:

Product	CCT (K)	Wattage (W)	Beam Angle(°)	Housing Finish	Driver
ZR105	2.7K=2700K 3K=3000K 3.5K=3500K 4K=4000K 5K=5000K	20W 25W	20° 25° 38° 55°	W=White B=Black C=Custom	S=On/off D=DALI2 V=1-10V Tr=Triac C=CASAMBI
ZR130		30W 35W			

Please choose product , wattage and beam angle from same color box matching respective product.

Product Code	Wattage	CCT (K)	Lumens	Dimensions (mm)
ZR105-4K-20W-38°-W-S	20W	4000K	1800lm	Ø105 X 110
ZR105-4K-25W-38°-W-S	25W	4000K	2250lm	Ø105 X 110
ZR130-4K-30W-38°-W-S	30W	4000K	2700lm	Ø130 X 135
ZR130-4K-35W-38°-W-S	35W	4000K	3150lm	Ø130 X 135