



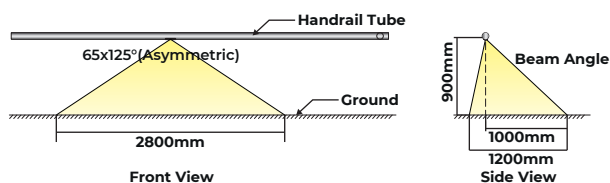


Beam Angle : 90x135°(Symmetric) , 65x125°(Asymmetric)


Suitable for handrail diameter: Ø48-52mm
Handrail Thickness: 1-2mm



Photometric:

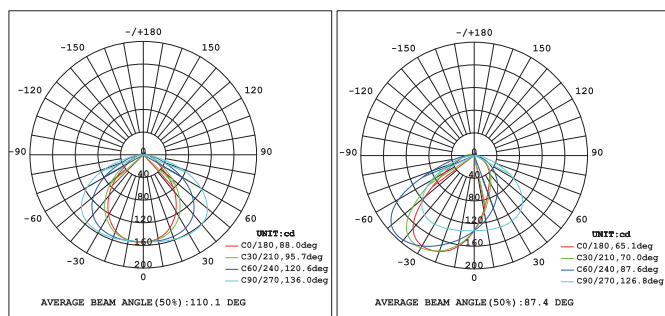

Installation:

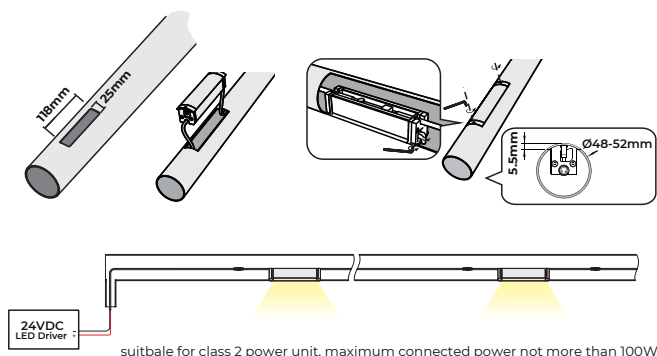

suitable for class 2 power unit, maximum connected power not more than 100W

Disclaimer:

LuxeLED All rights reserved. LuxeLED does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by LuxeLED.

Key Information

Shape	Linear
Mounting Type	Handrail
LED Type	SMD LED
Power Options	5W
CCT(K) Options	2700K / 3000K / 4000K / 6000K
Luminous Efficacy	93.2lm/W(Symmetric) 92.4lm/W(Asymmetric)
Beam Angle	90x135°(Symmetric) 65x125°(Asymmetric)
CRI	>85
SDCM	< 5
Lifespan	50,000 hours(L90 B10 @35°)

Physical

Housing	Aluminium
Housing Finish	Silver
Optical Lens	PMMA lens
Diffuser	PC

Environmental

Installation Environment	Indoor and Outdoor
IK Rating	10
IP Rating	IP67
Operating Temperature	-20° to 45°C

Driver

Input Voltage	24VDC
Class Rating	Class II
Power Factor	>0.92
Standard	On/off
Dimming Options	DALI2 / 1-10V

Ordering Guide:

Product	CCT	Wattage	Beam Angle(°)	Driver
IN = Inverell	2.7K = 2700K	5W	A = 90x135°	S=On/Off D=DALI 2 V=1-10V
	3K = 3000K			
	4K = 4000K			
	6K = 6000K			
			B = 60x125°	

* Please choose wattages and beam angle from same color box matching respective product.

Product Code	Wattage	CCT	Lumens	Dimensions (mm)
IN-3K-5W-A-S	5W	4000K	466lm	26 X 118
IN-3K-5W-B-S	5W	4000K	462lm	26 X 118

* Please contact us for other CCT(3000K, 5000K and 5700K) and Dimming control options.